

I. Installation Notice


1. Install water supply lines in accordance with this manual.
2. Floor drain should be installed in the location of the faucet.
3. Install the faucet only after the completion of house interior decoration in case paint or other chemicals erode the faucet surface.
4. Clean pipes to get rid of mud, sand or other debris blocked in pipes.
5. Wrap the thread part with Teflon tape before it is screwed. To avoid damage to the faucet, use a piece of cloth as a pad between the wrench mouth and the faucet. (Check whether the threads can be matched. Otherwise, too strong force applied to the wrench will damage the faucet).
6. After installation, check all the joints to make sure they are firmly connected. Then keep water flow. Turn on and off repeatedly to ensure there is no leakage around the joints. At this stage, the product is ready for normal use.
7. Keep the manual to the user.

II. Operation Notice

1. The product is used between water pressure 0.05~1.0MPa, water temperature 0~90°C.
2. Do not hang heavy things on the faucet.
3. Make sure the faucet is off when no water comes out of it (especially when nobody resides in the house or during the period of decoration or the absence of water).
4. Regularly clean the surface of faucet in neutral wash solution. Then dry it with a piece of soft cotton cloth to keep it bright.
5. When the room temperature drops to below 0°C, take necessary measures (such measures as keeping faucet warm and closing windows) to prevent the faucet from being frozen and even broken (especially when windows kept open for air ventilation while nobody resides in).
6. First turn on cold water, then hot water. To avoid scalding, regulate the water temperature before washing or showering and do not touch the faucet of hot water part.
7. Do not disassemble the product unless you are an expert.

Diagram 1

FA0323CP

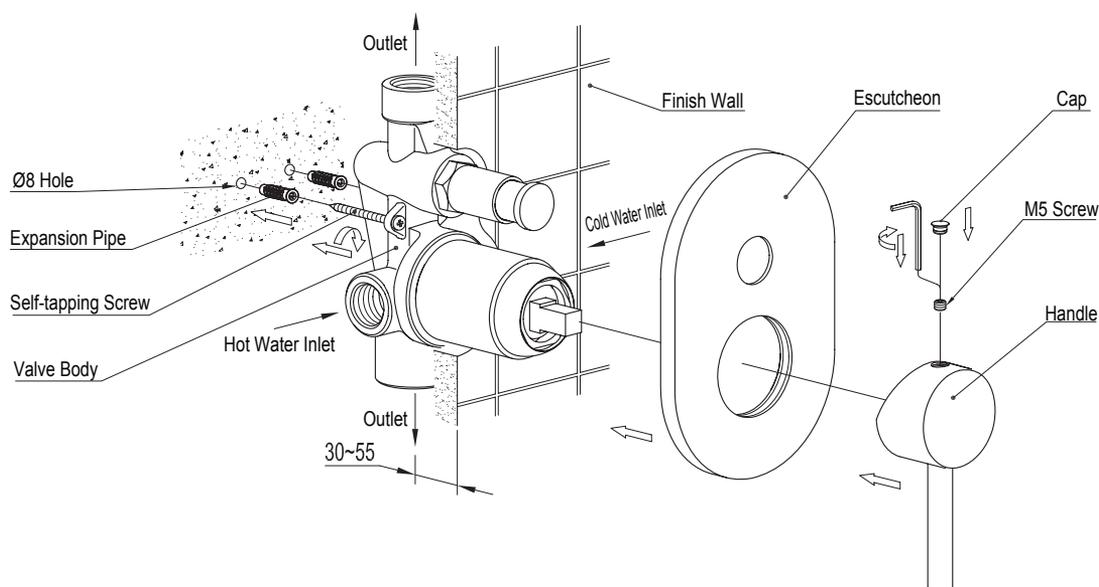

* The installation diagram is only for reference and subject to the real objects.

III. Installing Steps (As specified in diagram 1)

1. Install the valve body in accordance with diagram1 and connect the water supply pipe. Wrap the Teflon tape around the thread. Meanwhile, pay attention to the direction of hot and cold connections. The distance between pipe center and finish wall is 30~55mm. Before your installation, attention to flow running water to get rid of mud, sand and other debris in pipes.
2. Plug the outlet and turn on water. Then open the cartridge and keep pressure for two hours. Check there is no leakage. Notice: as the product is a built-in valve, make sure that pressure with water flowing is tested after pipe connection and before ceramic tiles are stuck on the wall so that no leakage occurs.
3. Put protection sheath before sticking ceramic tiles.
4. Take off the protection sheath and put on the escutcheons close to the wall. Install the handle and tighten it with M5 screw. Then plug the cap.
5. Turn on water for inspection.