

INSTRUCTION MANUAL

PACIFICA FA9001BL


Installation Notice

1. Please lay water pipes in accordance with this manual.
2. Floor drain should be installed on the site.
3. The product should be installed only after the completion of house interior decoration.
4. Clean pipes to get rid of mud, sand or other debris blocked in pipes before installation.
5. Check whether the threads can be matched. Otherwise, installing forcefully will damage the components.
6. After installation, check all the joints to make sure they are firmly connected. Keep water flowing. Turn on and off repeatedly to ensure no leaking problem. After that, the product is ready for normal use.
7. Hand the manual to users.

Operation Notice

1. The product is used under water pressure 0.05~1.0 MPa, water temperature 4~90°C.
2. Do not hang heavy things on the product.
3. Remember to turn off the mixer if no water flows out after turn on (Especially when nobody in the house or during the decoration period).
4. Clean the surface of the product regularly to keep it glossy. Note: Please do not use inappropriate tools such as sharp brushes, rough sponges, scouring pads or corrosive detergent. And it is not recommend to use the detergent sold in the market, because its formula changes frequently. Please clean the product with wet cloth and soapy water after usage. Then rinse the soap off with clean water and dry with a soft cotton cloth.
5. When indoor temperature drops below 0°C, take necessary measures (Keep the product warm, close windows) to prevent the product from frost cracking (Especially when windows open for air ventilation while nobody in the house).
6. Adjust the temperature before use to avoid scald.
7. Do not disassemble the product without help from the professionals.

Installation Diagram

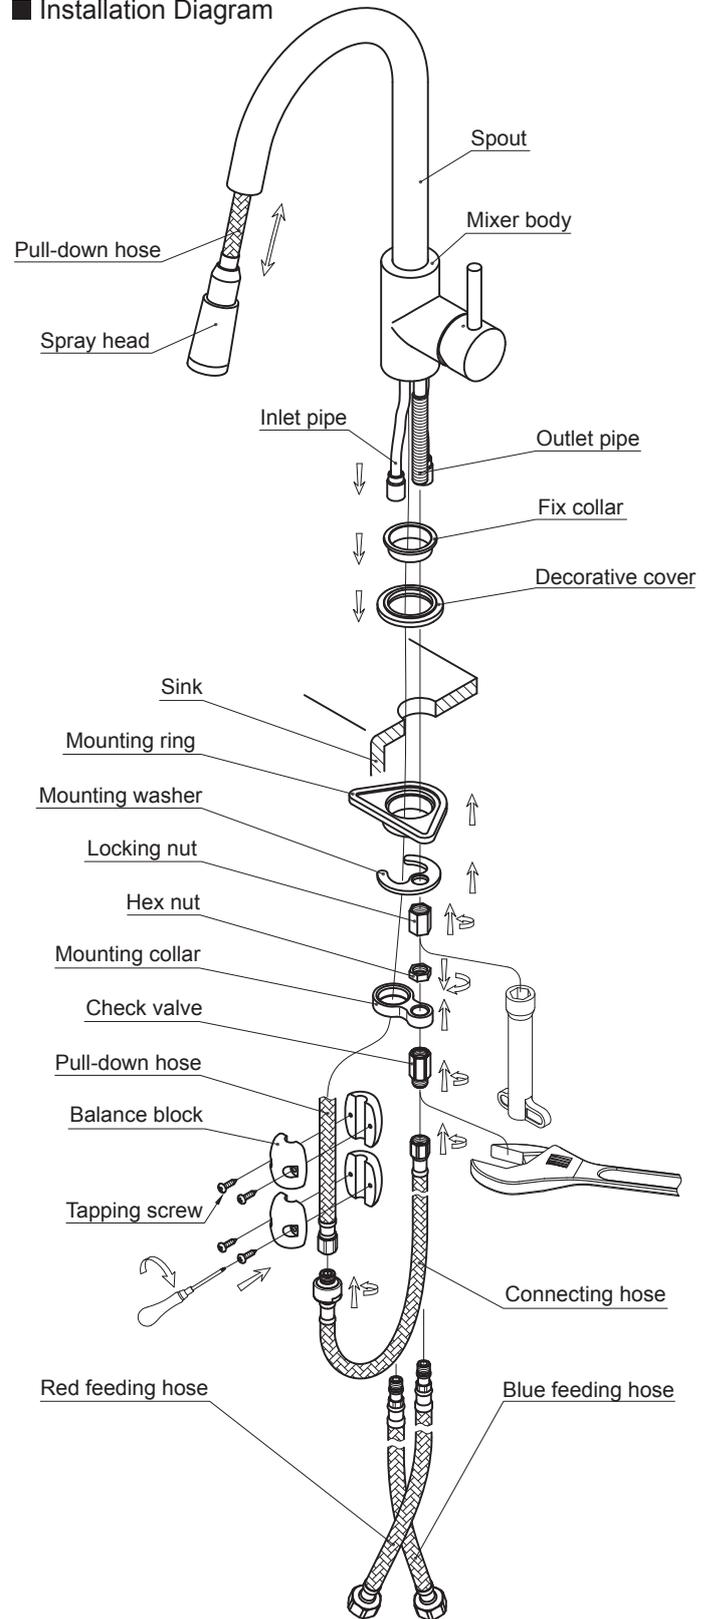

* The installation diagram is only for reference, the product is subject to the real object.

Installation steps

1. Disassemble the check valve, mounting collar, hex nut, locking nut, mounting washer and mounting ring from the mixer body in turn.
2. Place the mixer body through the fix collar, decorative cover and sink hole in turn with the pull-down hose. Install the mounting ring and the mounting washer in turn from below. Screw the locking nut and tighten it, then screw the hex nut.
3. As shown in the installation diagram, slightly spread the inlet pipes, install the mounting collar with its bigger hole for the pull-down hose and the smaller hole for the outlet pipe. Screw the check valve and then screw the hex nut down to fix the mounting collar.
4. Connect the pull-down hose with the check valve via the connecting hose. Unscrew the tapping screws of the balance blocks. Install the balance blocks at the position close to the connector of the pull-down hose. Fix the balance blocks with the tapping screws.
5. Connect the red and the blue feeding hoses to the triangle valves (Red for hot water and blue for cold water). Pull out the spray head, ensure that the spray head can be pulled down fluently.
6. Run the water to check whether the product is well installed.